Disc scrubber driers

CT51

B55 - BT55

SLS™ SELF LEVELING SYSTEM

Self-levelling mechanical system for an always perfect adherence between brush and floor.

ECO SELECT

- up to 20% less energy, water, and chemcal use
- increase running time up to 20%
- Reduced noise level to 2 dB (< 54 dB)

DBL™ DOUBLE BATTERY LIFE

Optimized charging cycles

- Recharing only when required.
- Extended battery life up to 100%.

ANC™ ADVANCED NOISE CONTROL

Silent

Thanks to the ANC™ an extremely advance study combining vacuum motor positioning, isolation and separated air flow. The result is extreme machine silence.

NO TOOLS

Brush, blades and suction hoses replacement without tools.

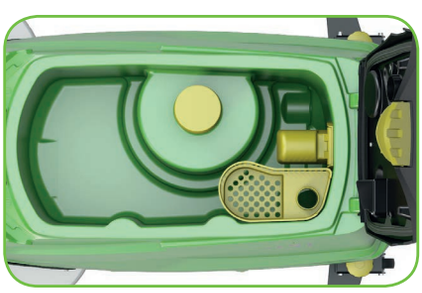

Full visibility of recovery tank - easy to clan and to maintain. Yellow touch points - immediate identification for all daily maintenance points.

Chemical dose kit: automatic detergent dosing system separated from water supply. integrated in the machine body.

Ergonomic : Drive Lever with innovative design allows the user to comfortably push / pull the operating lever from any position.

User friendly : Full machine control thanks to an intuitive central knob.

Ecological and economical : Two pre-setting programs.

Red bristle indicates when brush replacement required.

Main technical characteristics

Motor

- **ANC**™ : Advanced Noise Controle : is an extremely advance study combining vacuum motor positioning, isolation and separated air flow. The result is extreme machine silence. Lower noise levels (down to 54 dB) are available when ECO SELECT mode is activated.
- **ECO SELECT**: Less energy use, higher productivity and reduced noise level.

Batteries:

- **DBL**™: Double Battery Life : optimizes charging cycles and increases battery life up to 100%. Recharging optimizes only when required. Extended battery life up to 100%.

Maintenance

- **Squeegee blades**: made in Latex usable on 4 sides
- **MEMORY CARD**: Your maintenance completely under control. Service assistance management met SD-card. Aan de hand van de machine parameters is het makkelijk de service onder controle te houden en het onderhoud in te plannen.
- **Display**: User friendly, displays all information as follows :
  - battery charge capacity
  - hour meter
  - operating program settings
  - waterflow level settings
  - brush pressure level settings(only with XP-version)
  - Adjustable speed settings (BT-version)

Models

Code	Model	Scrubbing width (mm)	Squeegee width (mm)	Productivity (max speed) (m2/h)	Brush no.	Solution tank (l)	Recovery tank (l)	Power supply	Max speed (Km/h)	Weight (Kg)	Dimensions (LxWxH) (mm)
3.126.054.01	CT51-B55	550	815	2000	1 (disc)	50	53	24 V (2x12 V) - 95 Ah (C5)	3.5	67	1230x516x960
3.126.054.02	CT51-BT55	550	815	2475	1 (disc)	50	53	24 V (2x12 V) - 95 Ah (C5)	4.5	73	1230x516x960

* charger included - batteries not include l: 2x 3.217.005

Accessories

Code	Standard
3.8006.SPPPV01352	Nylon brush PPL - standard
3.8006.PMVR06296	Squeegee
3.8006.MPVR08039	Front squeegee blade (Latex)
3.8006.MPVR08035	Rear squeegee blade (Latex)

Code	Optional
3.8006.SPPV01348	Pad holder
3.8006.SPPV01415	Standard pad WHITE -21" (5 pieces)
3.8006.SPPV01433	Standard pad RED -21" (5 pieces)
3.8006.SPPV01451	Standard pad GREEN -21" (5 pieces)
3.8006.SPPV01469	Standard pad BLACK -21" (5 pieces)

Cylindrical scrubber driers

CT51
XP55R

SLS™ SELF LEVELING SYSTEM

Self-levelling mechanical system for an always perfect adherence between brush and floor.

ECO SELECT

- up to 20% less energy, water, and chemcal use
- increase running time up to 20%
- Reduced noise level to 2 dB (< 54 dB)

DBL™ DOUBLE BATTERY LIFE

Optimized charging cycles
- Recharing only when required.
- Extended battery life up to 100%.

ANC™ ADVANCED NOISE CONTROL

Silent
Thanks to the ANC™ an extremely advance study combining vacuum motor positioning, isolation and separated air flow. The result is extreme machine silence.

NO TOOLS

Brush, blades and suction hoses replacement without tools.

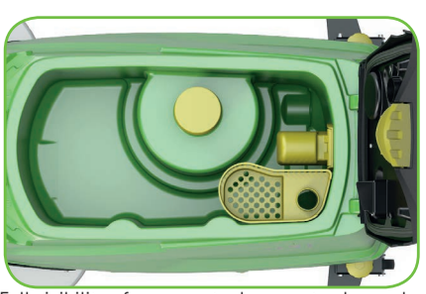

Full visibility of recovery tank - easy to clan and to maintain. Yellow touch points - immediate identification for all daily maintenance points.

Chemical dose kit: automatic detergent dosing system separated from water supply. integrated in the machine body.

Ergonomic : Drive Lever with innovative design allows the user to comfortably push / pull the operating lever from any position.

User friendly : Full machine control thanks to an intuitive central knob.

Ecological and economical : Two pre-setting programs.

Brushes motor, suction motor and electric components of high quality.

Red bristle indicates when brush replacement required.

Main technical characteristics

Motor

- **ANC**™ : Advanced Noise Controle : is an extremely advance study combining vacuum motor positioning, isolation and separated air flow. The result is extreme machine silence. Lower noise levels (down to 54 dB) are available when ECO SELECT mode is activated.
- **ECO SELECT**: Less energy use, higher productivity and reduced noise level.

Batteries:

- **DBL**™: Double Battery Life : optimizes charging cycles and increases battery life up to 100%. Recharging optimizes only when required. Extended battery life up to 100%.

Maintenance

- **Squeegee blades**: made in Latex usable on 4 sides
- **MEMORY CARD**: Your maintenance completely under control. Service assistance management met SD-card. Aan de hand van de machine parameters is het makkelijk de service onder controle te houden en het onderhoud in te plannen.

- **Display**: User friendly, displays all information as follows :
  - battery charge capacity
  - hour meter
  - operating program settings
  - waterflow level settings
  - brush pressure level settings(only with XP-version)
  - Adjustable speed settings (BT-version)

Models

Code	Model	Scrubbing width (mm)	Squeegee width (mm)	Productivity (max speed) (m2/h)	Brush no.	Solution tank (l)	Recovery tank (l)	Power supply	Max speed (Km/h)	Weight (Kg)	Dimensions (LxWxH) (mm)
3.126.054.03	CT51-XP55R	550	815	2000	2 cyl	50	53	24 V (2x12 V) - 95 Ah (C5)	4.2	101	1329 x 563 x 1033

* charger included - batteries not include l: 2x 3.217.005

Accessories

Code	Standard
3.8006.SPPV01163	Cilindrical nylon brush PPL - standard (2 pieces)
3.8006.PMVR06296	Squeegee
3.8006.MPVR08039	Front squeegee blade (Latex)
3.8006.MPVR08035	Rear squeegee blade (Latex)